



Beta Three

# CTM SERIES

Full Range Active Speaker


# CTM800S/CTM800B



## FEATURES

- High output SPL and sensitivity
- 1 x 8" high power transducer
- 1 x 25mm diaphragm compression driver
- Heavy duty protective grill and high strength polypropylene precision injection molded
- Built-in Class D power amplifier module
- Master volume, Bass and Treble control
- Switchable between Mic and Line input
- **CTM800B:** Bluetooth connection available

## CABINET

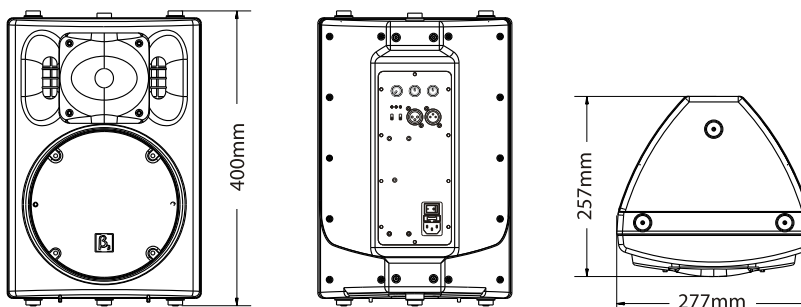


# CTM1000S/CTM1000B



## FEATURES

- High output SPL and sensitivity
- 1 x 10" high power transducer
- 1 x 25mm diaphragm compression driver
- Heavy duty protective grill and high strength polypropylene precision injection molded
- Built-in Class D power amplifier module
- Master volume, Bass and Treble control
- Switchable between Mic and Line input
- **CTM1000B:** Bluetooth connection available

## CABINET

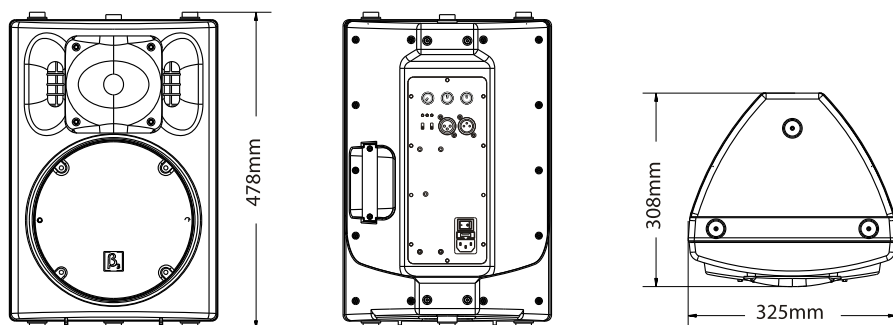


# CTM1200S/CTM1200B/CTM1200M



## FEATURES

- High output SPL and sensitivity
- 1 x 12" high power transducer
- 1 x 34mm diaphragm compression driver
- Heavy duty protective grill and high strength polypropylene precision injection molded
- Built-in Class D power amplifier module
- Master volume, Bass and Treble control
- Switchable between Mic and Line input
- **CTM1200B:** Bluetooth connection available
- **CTM1200M:** Bluetooth connection, MP3 player available

## CABINET

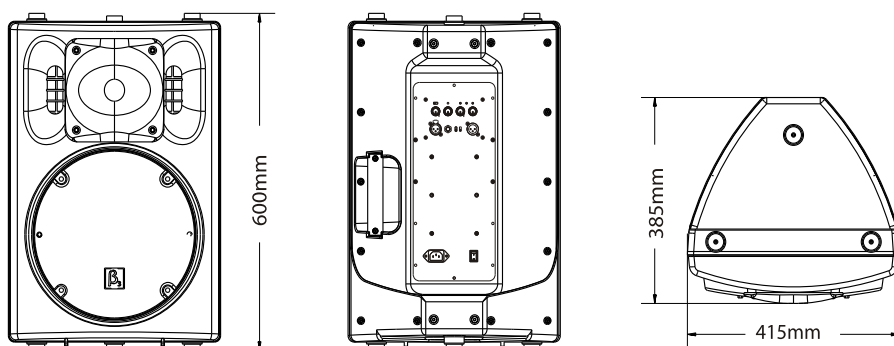




# CTMI500S/CTMI500B/CTMI500M



## ■ FEATURES

- High output SPL and sensitivity
- 1 x 15" high power transducer
- 1 x 34mm diaphragm compression driver
- Heavy duty protective grill and high strength polypropylene precision injection molded
- Built-in Class D power amplifier module
- Master volume, Bass and Treble control
- Switchable between Mic and Line input
- **CTMI500B:** Bluetooth connection available
- **CTMI500M:** Bluetooth connection, MP3 player available

## ■ CABINET

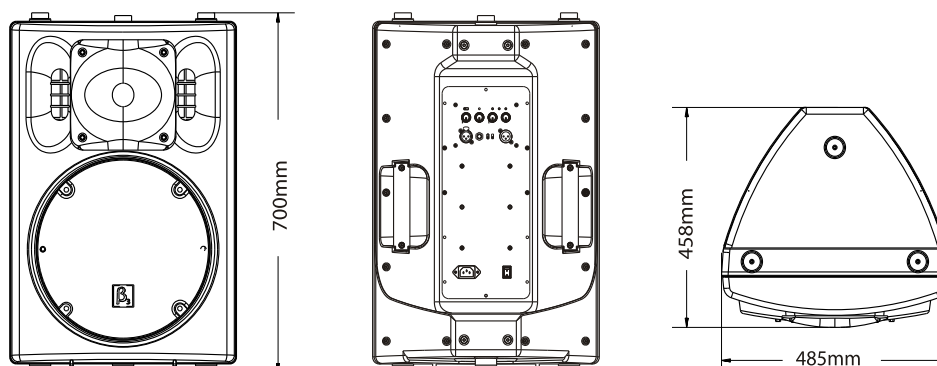

## ■ SPECIFICATIONS


Model	CTM8005	CTM800B	CTMI0005	CTMI000B	CTMI2005	CTMI200B	CTMI200M	CTMI5005	CTMI500B	CTMI500M
Transducers	1x8" LF, 1 x 25mm HF		1x10" LF, 1 x 25mm HF			1x12" LF, 1 x 34mm HF			1x15" LF, 1 x 34mm HF	
Frequency Response(-3db)	65Hz-18kHz		60Hz-18kHz			45Hz-20kHz			45Hz-20kHz	
Maximum SPL(1w@1m)	110dB/116dB		111dB/117dB			118dB/124dB			120dB/126dB	
Dispersion(HxV)	120°x120°		120°x120°			90°x85°			90°x85°	
Impedance	8Ω		8Ω			8Ω			8Ω	
Output Power	120W+40W		150W+50W			400W			400W	
Connector	1 x XLR		1 x XLR			1 x XLR			1 x XLR	
Input Type	1 x XLR/Bluetooth		1 x XLR/Bluetooth			1 x XLR/Bluetooth			1 x XLR/Bluetooth	
Input Impedance	Line	> 20KΩ	> 20KΩ			20KΩ			20KΩ	
	Microphone	> 1KΩ	> 1KΩ			2KΩ			2KΩ	
Safe Voltage Range	100V-240V ~50/60Hz		100V-240V ~50/60Hz			100V-240V ± 10% AC			100V-240V ± 10% AC	
Power consumption	Dynamic	13.5W	13.5W			15.5W			15.5W	
	Static					70W			70W	
Dimensions(WxDxH)	277x 257x 400mm		325x 308x 478mm			415x 385 x 600mm			485x 458 x 700mm	
Packaging Dimensions(WxDxH)	360 x 330 x 475mm		380 x 360 x 540mm			470 x 440 x 685mm			550 x 520 x 805mm	
Net Weight	7.7kg		10.4kg			16.0kg			23.0kg	
Gross Weight	8.7kg		11.4kg			18.5kg			26.0kg	
MP3							●			●
Bluetooth		●		●		●			●	●

## ■ INSTALLATION ACCESSORIES (OPTIONAL)


Product code of sound support:  
101.06.0036.00085 black



## ■ INSTALLATION

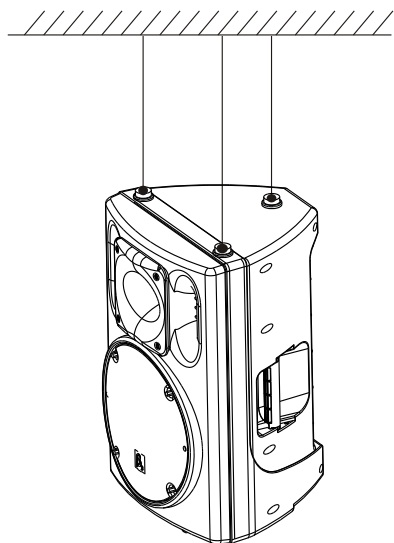

Hang

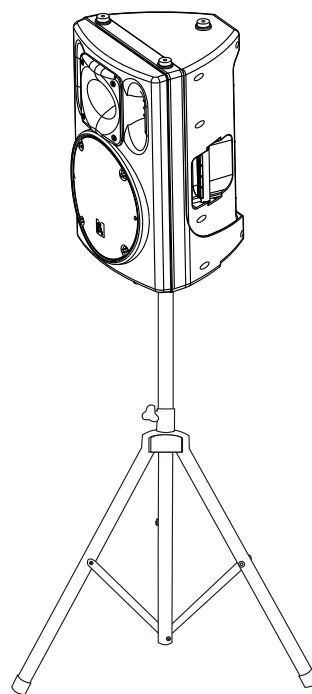

Support





## Application

- Medium-sized Conference Rooms
- Multi-functional Hall
- Church
- Auditorium
- Performance Places

