






Σ BII8a

PROFESSIONAL ACTIVE SUBWOOFER

User's manual



3G-17031701-WA



Features


- **BL18a is the active subwoofer with 600W amplifier module, the cabinet built with high intensity materials the crossover point is adjustable from 80Hz to 250Hz and volume is adjustable. One 18" woofer, six bands pass configuration suitable for big Karaoke room, Hi room, disco etc. Can work with other ELDER speaker.**

- ☐ Band pass active subwoofer with big power
- ☐ One 18" woofer
- ☐ 600W long time power handling
- ☐ 100mm voice coil provides the powerful energy
- ☐ Six bands LF structure under computer simulating design make LF very powerful
- ☐ Composite chamber for amplifier module, effective heat-sink configuration
- ☐ Adjustable crossover point with reversed phase switch, suitable for all kinds of full range speakers
- ☐ Prefect built-in protection circuit, high reliability







Specifications

Fequency Response(-3dB):	35Hz-250Hz
Max SPL(1m):	133dB
Rated Power:	600W
THD:	<2%
Input Connectors:	XLR K3P
Net Weight(1Pcs):	45Kg
Gross Weight:	50Kg
Dimensions (W×D×H):	693×580×530mm
Packaging Dimensions 1pcs/pack(W×D×H):	803×690×650mm

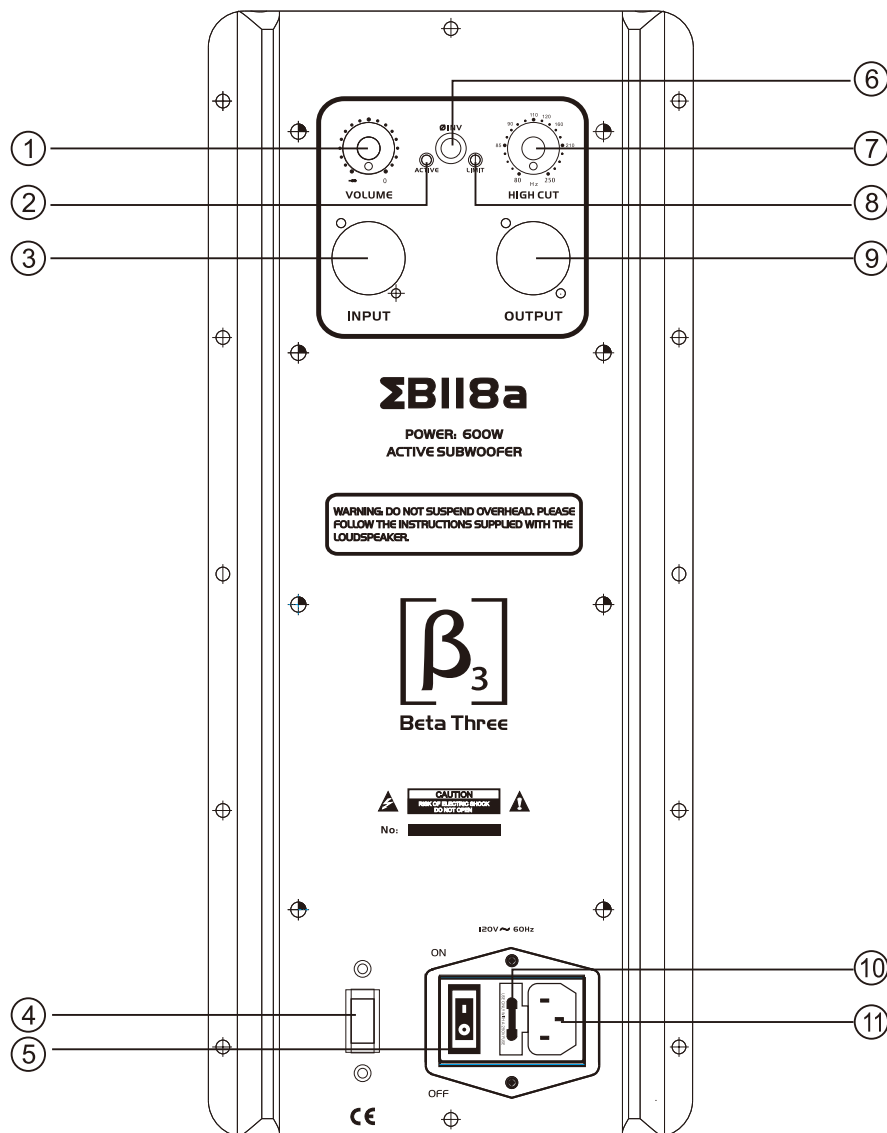

1. Volume control.
2. Active indicator.
3. Line/microphone input.
4. 120V voltage input selector.
5. Power **ON/OFF** switch.
6. Phase inverting switch.
7. High cut.(80Hz~250Hz adjustable)
8. Limit indicator.
9. Line/microphone output.
10. Protection fuse.
11. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.

Cabinet Dimension

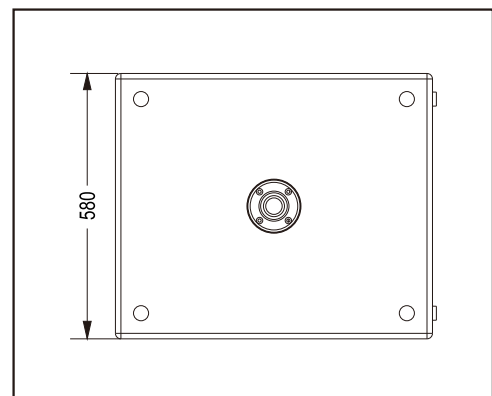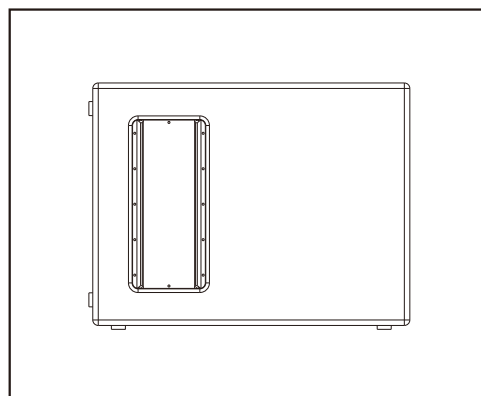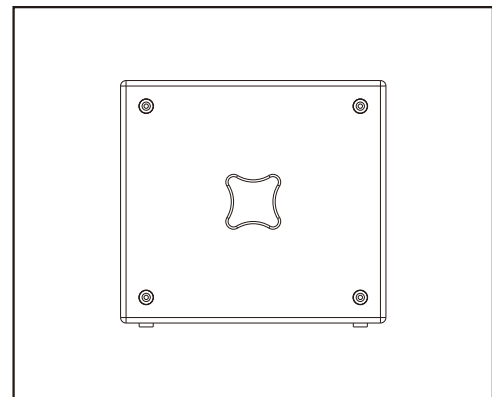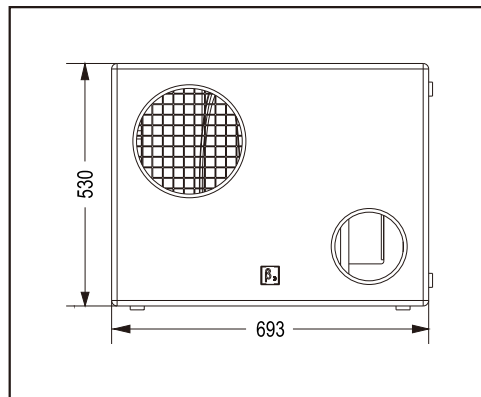

Installation drawing

